


2009 Quotation for Extrusion Welder EXWELD ALPHA-C



External Temperature Controls

CONQUERING INSIDE CORNERS

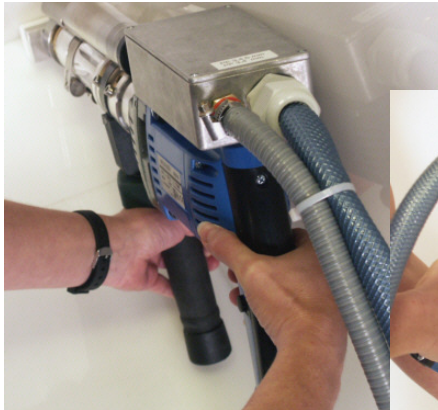

- Suitable for welding PE, PP, PVDF and other thermoplastic materials
- Dual channel temperature controller for extrudate and preheat, cold start protection
- Electronically controlled drive motor with variable welding speed
- Patented, trouble-free rod intake system
- Requires use of external air supply – see DT 5 blower

Includes *TWISTY* attachment and multi-position handle for easy access into corners.

Weights only 12 lbs

Voltage 230V, Single phase
Power Consumption: 3680W max.
Maximum Output: PE -3 Kg/hr (6.6 lbs/hr)
 PP -2.2 Kg/hr (4.8 lbs/hr)
Length: 21"
Rod Size: PP 3 or 4mm (1/8" or 5/32")
 PE 3, 4 or 5mm (1/8", 5/32" or 3/16")

Warranty: FOB Burr Ridge, IL
 12-months
Delivery Time: From Stock
Payment Terms: Net 30 days
 (with credit approval)